

CASTOR DOB LED Floodlight 300 W



General Application Areas



Closed Parking lots



Factories




Building Circles



Park Walkway

Optical Beam Angles



110°

General Information

The CASTOR DOB LED Floodlight is a lighting fixture designed for a variety of applications, including parks, gardens, squares, auto-parks, building perimeters, walkways, and landscape lighting. It is mounted on poles ranging from 3 to 7 meters in height. The luminaires feature LED modules with high energy efficiency and a compact frame structure. The CASTOR DOB LED Floodlight is classified according to LED power, with different sizes and dimensions available. Various light distribution and power options are available to suit different area illumination needs, and designs and productions can be tailored to meet project specifications.

CASTOR DOB LED Floodlight 300 W

odak[®]
R&D
CENTER
smart city technologies


Technical Specifications

Power	:300 W
Input Voltage	:200-240 V AC 50/60 HZ
Power Factor	:>0,9
Effectiveness Factor	:80+lm/W
Luminous Flux	:24000lm
Light Angle	:110°
Color Temperature (CCT)	:6500K
Color Rendering Index (CRI)	:80+
IP Protection Class	:IP 65-IP66(Optional)
Dimensions	:325x425x15mm
Warranty Period	:3 Years

Optik ve Elektriksel Özellikler

Gövde	Polikarbon Ekstrüzyon	Çalışma Sıcaklığı	-25°/+55°C
Renk Seçenekleri	RAL 9005	RoHS Uyumu	Evet
Işık Kaynağı	LED	Kullanım Ömrü	≥60.000 Saat
Darbe Dayanımı	IK 08	Kısmı Opsiyonları	1-10V, TRIAC, DALI
Toplam Harmonik Bozulma	<%20	CE	Yok

Teknik Çizim ve Bağlantı Şeması

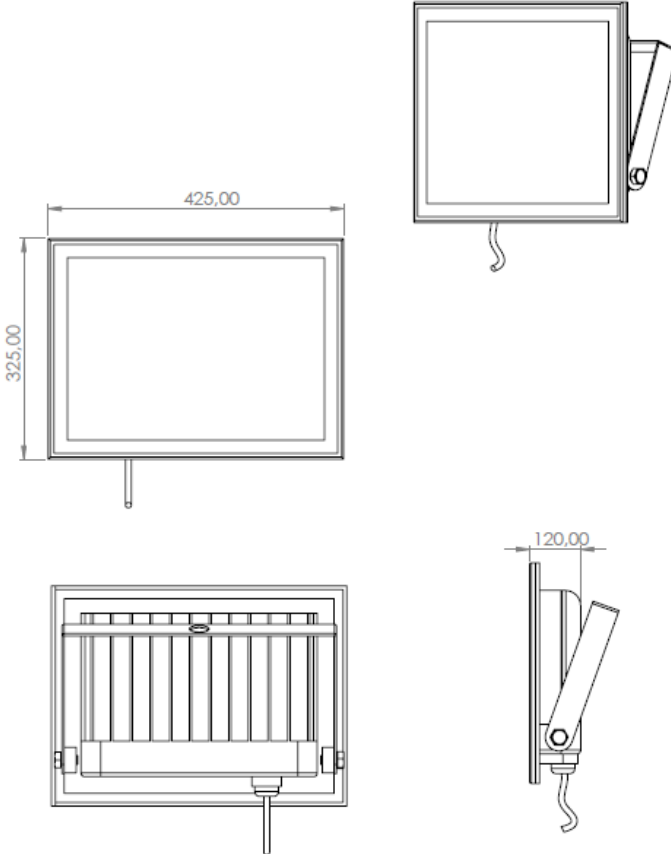

CASTOR DOB LED Floodlight 300 W

Product Variations

Product Code	Power	Input Voltage	Luminous Flux	Light Angle	Dimensions
CSR-030SM-01101-865-9005	30W	200-240-V AC 50-60 HZ	2400 lm	110°	150x173x03mm
CSR-050SM-01101-865-9005	50W	200-240-V AC 50-60 HZ	4000 lm	110°	181x213x04mm
CSR-100SM-01101-865-9005	100W	200-240-V AC 50-60 HZ	8000 lm	110°	250x285x07mm
CSR-150SM-01101-865-9005	150W	200-240-V AC 50-60 HZ	12000 lm	110°	325x425x12mm
CSR-200SM-01101-865-9005	200W	200-240-V AC 50-60 HZ	16000 lm	110°	325x425x13mm